


Proximity Sensor

(Inductive Type)

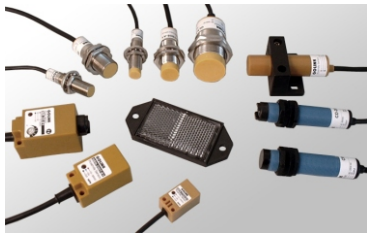

- Wide operating voltage range: 90~250VAC or 10~30VDC
- All model with the operating indicator for easy identified
- Good waterproof, conforming to IP-67 requirement
- Output method : NPN, PNP, AC - 2 wires, AC - 3 wires

Outline Dimension	Model No.	Output Status	Output Method	Sensing Distance	Mounting Method	Operating Voltage	Response Frequency	
	GEN-1705-E1	NO	NPN	5mm	Non-Flushed	10-30VDC	600Hz	
	GEN-1705-E2	NC						
	GEN-1705-P1	NO	PNP					
	GEN-1804-E1	NO	NPN	4mm	Non-Flushed	10-30VDC	500Hz	
	GEN-1804-E2	NC						
	GEN-1804-P1	NO	PNP			90-250VAC	15Hz	
	GEN-1804-A1	NO	AC - 2 wire					
	GEN-2507-E1	NO	NPN	7mm	Non-Flushed	10-30VDC	500Hz	
	GEN-2507-E2	NC						
	GEN-2507-P1	NO	PNP			90-250VAC	15Hz	
	GEN-2507-A1	NO	AC - 2 wire					
	GEN-2507-3A1	NO	AC - 3 wire			30Hz		
	GEN-2507-3A2	NC	AC - 3 wire					
	GEN-3010-E1	NO	NPN	10mm	Non-Flushed	10-30VDC	500Hz	
	GEN-3010-E2	NC						
	GEN-3010-P1	NO	PNP			90-250VAC	15Hz	
	GEN-3010-A1	NO	AC - 2 wire					
	GEN-3010-3A1	NO	AC - 3 wire			30Hz		
	GEN-3010-3A2	NC	AC - 3 wire					
	GLX-1202-E1	NO	NPN	2mm	Flushed	10-30VDC	800Hz	
	GLX-1202-E2	NC						
	GLX-1202-P1	NO	PNP					
	GLX-1202-CE1	NO	NPN			5-16VDC		
	GLX-1202-CP1	NO	PNP					
	GLX-1204-E1	NO	NPN	4mm	Non-Flushed	10-30VDC	500Hz	
	GLX-1204-E2	NC						
	GLX-1204-P1	NO	PNP					
	GLX-1204-CE1	NO	NPN			5-16VDC		
	GLX-1204-CP1	NO	PNP					
	GLX-1805-E1	NO	NPN	5mm	Flushed	10-30VDC	400Hz	
	GLX-1805-E2	NC						
	GLX-1805-P1	NO	PNP			90-250VAC		20Hz
	GLX-1805-A1	NO	AC - 2 wire					
	GLX-1805-3A1	NO	AC - 3 wire			40Hz		
	GLX-1805-3A2	NC	AC - 3 wire					
	GLX-1808-E1	NO	NPN	8mm	Non-Flushed	10-30VDC	300Hz	
	GLX-1808-E2	NC						
	GLX-1808-P1	NO	PNP			90-250VAC		20Hz
	GLX-1808-A1	NO	AC - 2 wire					
	GLX-1808-3A1	NO	AC - 3 wire			40Hz		
	GLX-1808-3A2	NC	AC - 3 wire					
	GLX-3010-E1	NO	NPN	10mm	Flushed	10-30VDC	200Hz	
	GLX-3010-E2	NC						
	GLX-3010-P1	NO	PNP			90-250VAC		20Hz
	GLX-3010-A1	NO	AC - 2 wire					
	GLX-3010-3A1	NO	AC - 3 wire			40Hz		
	GLX-3010-3A2	NC	AC - 3 wire					
	GLX-3015-E1	NO	NPN	15mm	Non-Flushed	10-30VDC	100Hz	
	GLX-3015-E2	NC						
	GLX-3015-P1	NO	PNP			90-250VAC		20Hz
	GLX-3015-A1	NO	AC - 2 wire					
	GLX-3015-3A1	NO	AC - 3 wire			40Hz		
	GLX-3015-3A2	NC	AC - 3 wire					

Proximity Sensor

Outline Dimension	Model No.	Output Status	Output Method	Sensing Distance	Mounting Method	Operating Voltage	Response Frequency
Proximity Sensor				Inductive Type			
	GEX-1805-E1	NO	NPN	5mm	Non-Flushed	10-30VDC	500Hz
	GEX-1805-E2	NC					
	GEX-1805-P1	NO	PNP			90-250VAC	20Hz
	GEX-1805-A1	NO					
	GEX-1805-3A1	NO	AC - 2 wire				
	GEX-1805-3A2	NC	AC - 3 wire				
	GEC-2008-E1	NO	NPN	8mm	Non-Flushed	10-30VDC	200Hz
	GEC-2008-E2	NC					
	GEC-2008-P1	NO	PNP			90-250VAC	20Hz
	GEC-2008-A1	NO	AC - 2 wire				
	GEC-2008-3A1	NO	AC - 3 wire				
	GEC-2008-3A2	NC	AC - 3 wire				
	GEN-3010-E1	NO	NPN	10mm	Non-Flushed	10-30VDC	80Hz
	GEN-3010-E2	NC					
	GEN-3010-P1	NO	PNP			90-250VAC	20Hz
	GEN-3010-A1	NO	AC - 2 wire				
	GEN-3010-3A1	NO	AC - 3 wire				
	GEN-3010-3A2	NC	AC - 3 wire				
Proximity Sensor				Capactive Type			
	KEN-3015-E1	NO	NPN	15mm	Non-Flushed	10-30VDC	40Hz
	KEN-3015-E2	NC					
	KEC-2010-E1	NO	NPN	10mm	Non-Flushed	10-30VDC	70Hz
	KEC-2010-E2	NC					
	KEC-3425-E1	NO	NPN	15mm	Non-Flushed	10-30VDC	40Hz
	KEC-3425-E2	NC					
	KEC-3425-A1	NO	AC - 2 wire			90-250VAC	
	CP18-30N	NO	NPN	20mm	Non-Flushed	10-30VDC Ripple<20% of Vp-p	100Hz
	CP18-30NB	NC					
	CP18-30P	NO	PNP				
	CP18-30PB	NC					
	CP30-50C	NO	NPN	30mm	Non-Flushed	10-30VDC	100Hz
		NC					
		NO	PNP				
		NC					
	CP30-50S	NO	AC - 2 wire	90-250VAC	15Hz		
CP30-50SB	NC						